


DESIGN PARAMETERS

The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50' above ground using ASCE 7-95 exposure category 'C'. An additional 2' in height was added to the base during these calculations to account for variations in roof pitch, etc.

P.O. BOX 1340  
 HENDERSON, TX 75653-1340  
 903/657-6522  
 FAX# 903/657-2318




DOME UNIT #701

CUPOLA UNIT #701 WITH  
 GOTHIC TOP KRINKLGLAS WINDOWS  
 (ALSO AVAILABLE WITH VENTED LOUVERS)

CUPOLA UNIT #700

CUPOLA UNIT #1076

\*shown with optional clock

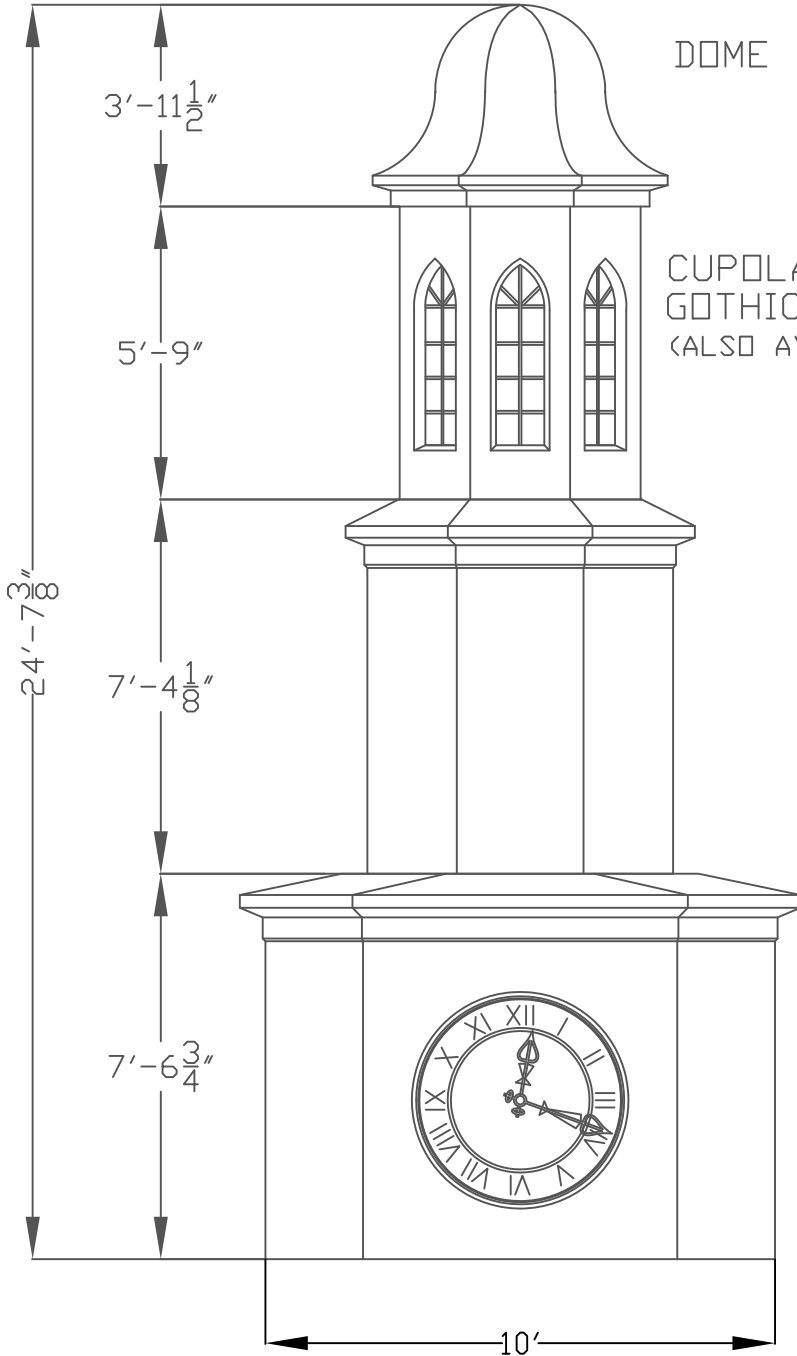

Project: CUPOLA UNIT #1106HCB

Date: 02-18-09

Revisions

Scale: 1/4"=1'

Drawing By: WMP

Checked By:

File # ALL-STL\

DWG # CU1106CBF

Sheet#

E1F  
 ELEVATION

THESE DRAWINGS ARE THE PROPERTY OF FIBERGLASS SPECIALTIES INC. DIMENSIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL CUPOLA AND STEEPLE UNITS ARE FABRICATED USING MINIMAL STANDING SEAMS UNLESS OTHERWISE NOTED. ALL CUPOLA AND STEEPLE UNITS ARE DESIGNED TO BE ERECTED ON A COMPLETED ROOFING SYSTEM AND ARE NOT GUARANTEED TO BE LEAK PROOF.